



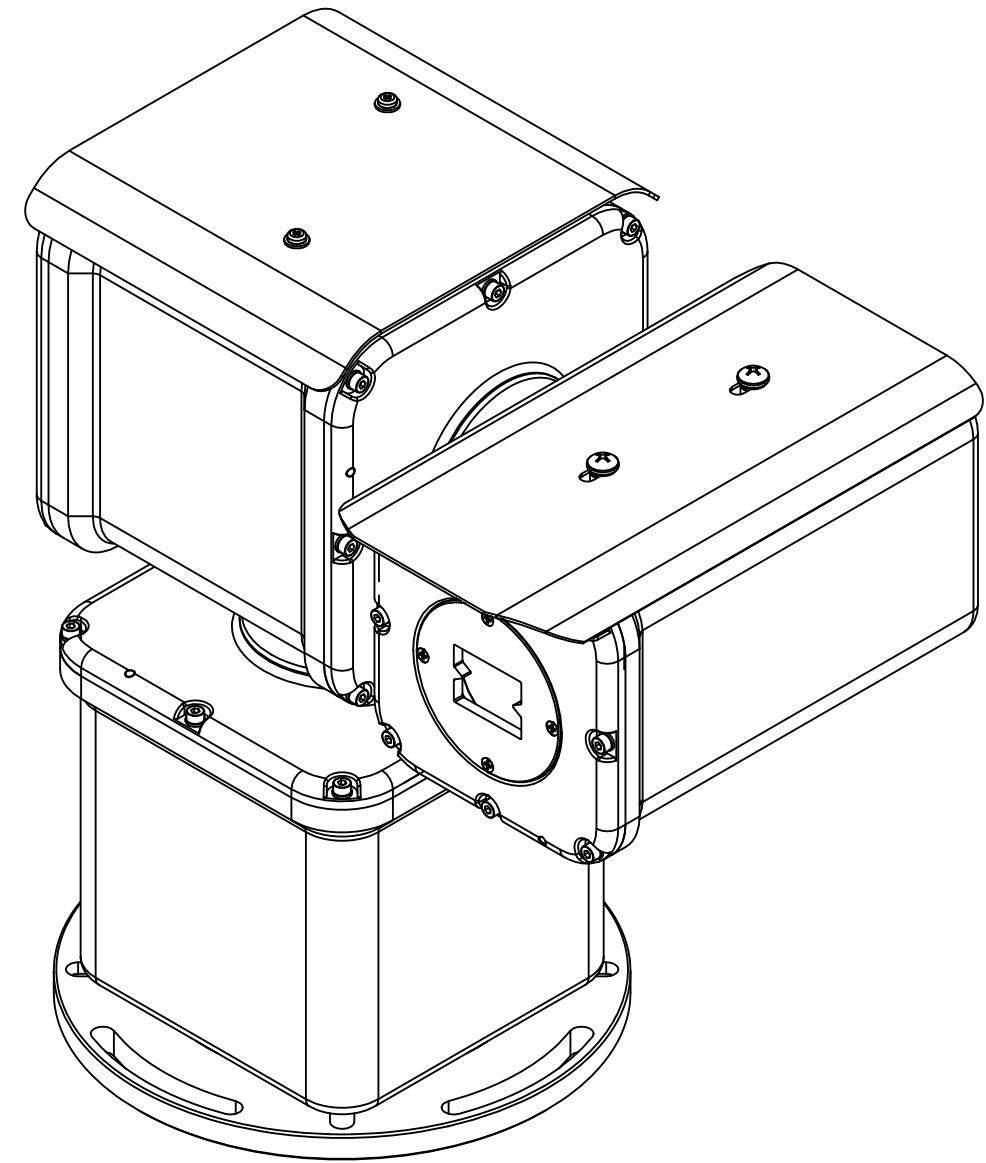

GENERAL TOLERANCE			
mm	PRECISION	GENERAL	LESSER
~3	± 0.05	± 0.10	± 0.20
3~6	± 0.05	± 0.10	± 0.30
6~30	± 0.10	± 0.20	± 0.50
30~120	± 0.15	± 0.30	± 0.80
120~400	± 0.20	± 0.50	± 1.20
400~1000	± 0.30	± 0.80	± 2.00
1000~2000	± 0.50	± 1.20	± 3.00

寸法 $\phi 225 \times H15\text{mm}$
 材質 SUS316L
 重量 1.5kg
 耐荷重 51kg

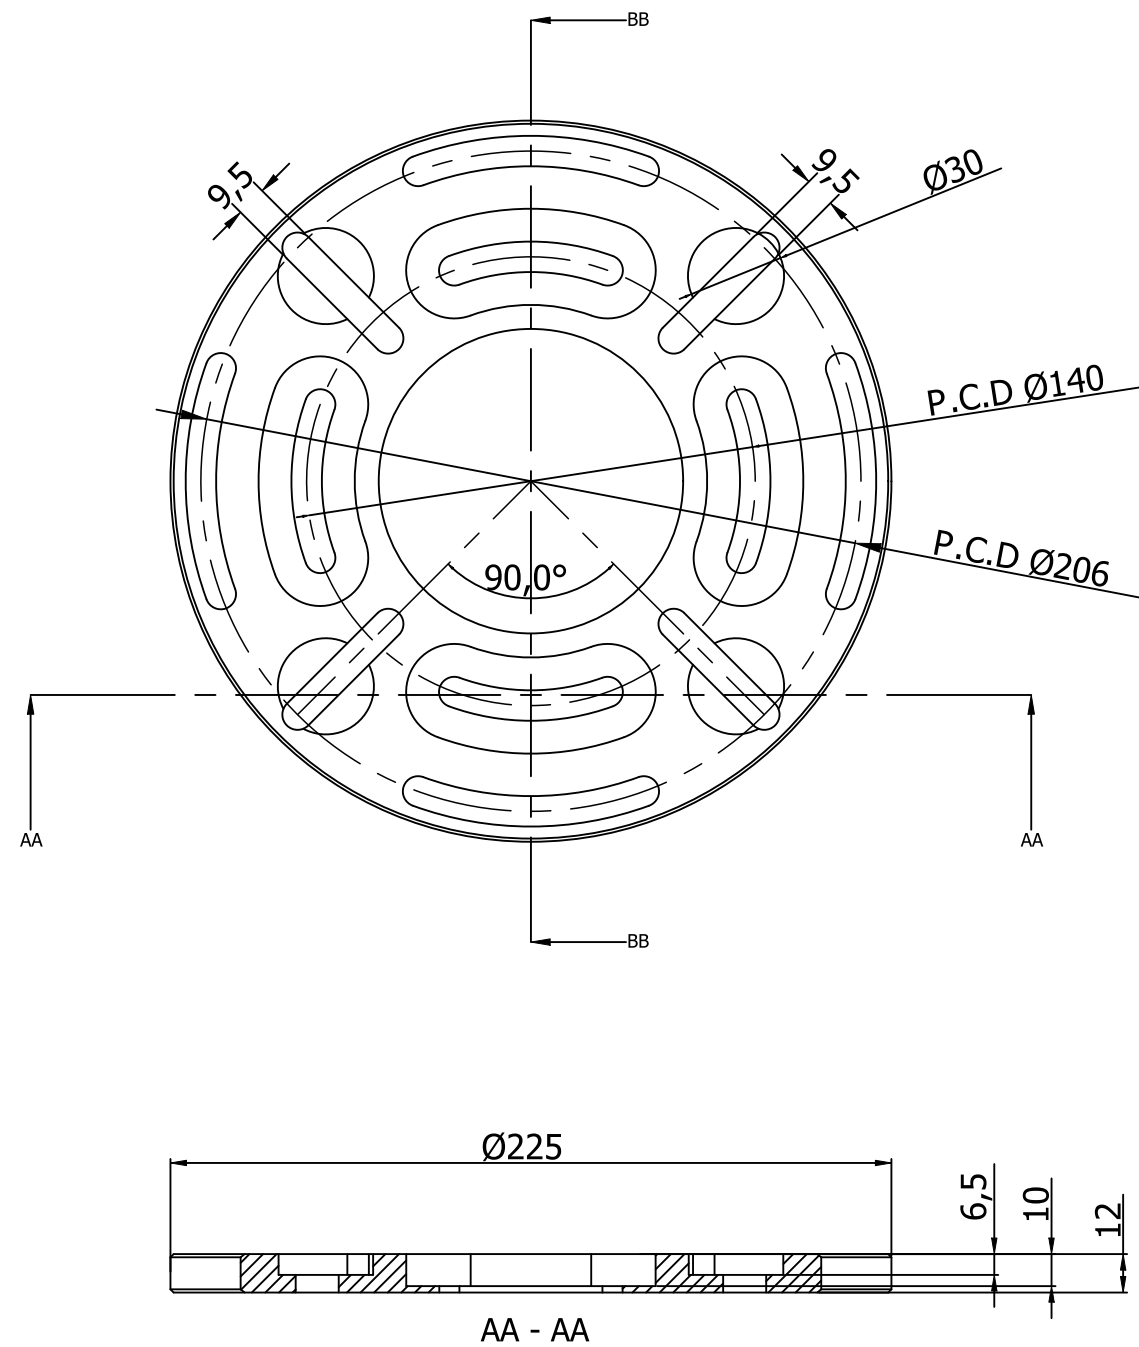